


Preparation unit——GA Series


GAC Series F.R.L. combination



Reflux valve is attached



No reflux valve is attached



Ordering code

GAC300 **10** **S** **W** **T** **K**

1
2
3
4
5
6
7
8
9

① Model	② Material of bowl	③ Port size	④ Drain type	
GAC200:GA200 Series F.R.L unit	Blank: PC N: Nylon C: Metal	06: 1/8" 08: 1/4"	Blank: Semi-auto drain A: Automatic drain	
GAC300:GA300 Series F.R.L unit		08: 1/4" 10: 3/8" 15: 1/2"		
GAC400:GA400 Series F.R.L unit		10: 3/8" 15: 1/2"		
GAC600:GA600 Series F.R.L unit	20: 3/4" 25: 1"			
C: Metal				
⑤ Type code	⑥ Pressure gauge	⑦ Filtering grade	⑧ Thread type	⑨ Reflux valve
S: Standard L: Lower pressure [Note1]	Blank: Circular with clip N: No pressure gauge	Blank: 40μm W: 5μm	T: NPT (Scale: bar/psi)	Blank: Without reflux valve K: with reflux valve [Note2]

[Note1] The maximum work pressure of lower pressure type is 58psi(0.4MPa);

[Note2] Please refer to page 141 for details of reflux valve.

Product feature

1. Oil dripping adopts gap seal structure, which makes the adjustment of oil supply more reliable.
2. Oil feed ring can only make one full turn. The quantity of oil supply, basically taking on linear distribution. The quantity of oil supply can be generally calculated according to the position of graduation ring.
3. Filling of oil while the lubricator is under pressure is made possible.
4. Special drip nozzle structure will produce negative pressure in oil dripping outlet and the mist flow is minimal.
5. Quick and reliable mounting clamps makes it convenient to install and use.
6. The performance of pressure adjustment is reliable with high precision.
7. The efficiency of eliminating moisture and solid grain is high.
8. Two drain types are available: semi-auto drain and automatic drain.
9. Three material of bowl are available: PC, Nylon and metal.





GAC Series F.R.L. combination

Specification

Model	GAC20006	GAC20008	GAC30008	GAC30010	GAC30015	GAC40010	GAC40015	GAC60020	GAC60025	
Fluid	Air									
Port size [Note1]	1/8"	1/4"	1/4"	3/8"	1/2"	3/8"	1/2"	3/4"	1"	
Filtering grade	40 μm or 5 μm									
Pressure range	20~130psi(0.15~0.9MPa)									
Max. pressure	145psi(1.0MPa)									
Proof pressure	215psi(1.5MPa)									
Temperature range	-5~70°C(Unfreeze)									
Capacity of drain bowl	25CC		60CC			100CC		205CC		
Capacity of oil bowl	36CC		98CC			185CC		410CC		
Recommended lubricant	ISO VG 32or equivalent									
Weight	750g		1300g			2390g		4600g		
Constitute	Filter	GAF20006	GAF20008	GAF30008	GAF30010	GAF30015	GAF40010	GAF40015	GAF60020	GAF60025
	Regulator	GAR20006	GAR20008	GAR30008	GAR30010	GAR30015	GAR40010	GAR40015	GAR60020	GAR60025
	Lubricator	GAL20006	GAL20008	GAL30008	GAL30010	GAL30015	GAL40010	GAL40015	GAL60020	GAL60025

[Note1] NPT thread is available.





Pressure chart

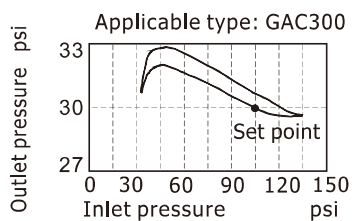


Preparation unit—GA Series

GAC Series F.R.L. combination

Flow chart

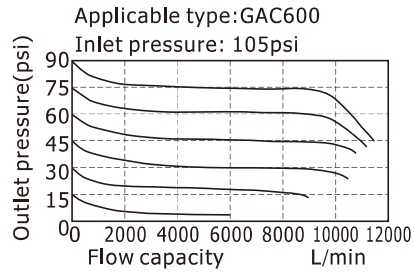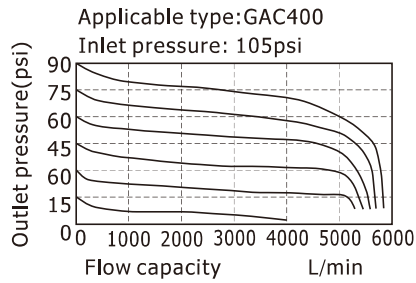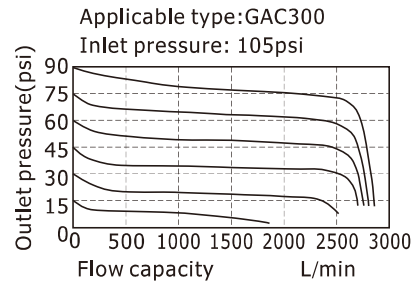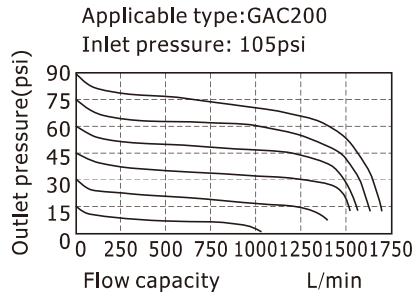

Dimensions

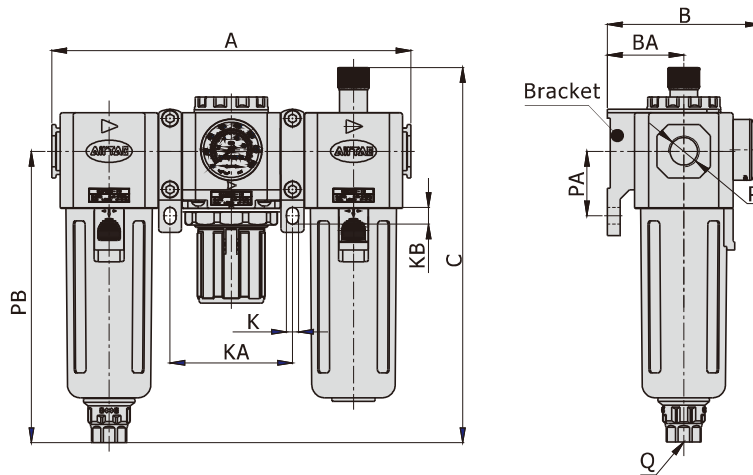

[Unit: mm]

Model\Item	A	B	BA	C	K	KA	KB	P	PA	PB	Q
GAC200-06	163.5	69	30	160	5.5	55.5	8.5	1/8"	25	120	M5X0.8
GAC200-08	163.5	69	30	160	5.5	55.5	8.5	1/4"	25	120	M5X0.8
GAC300-08	195	83	41.5	203.5	6.5	66.5	9	1/4"	35	158	G1/4
GAC300-10	195	83	41.5	203.5	6.5	66.5	9	3/8"	35	158	G1/4
GAC300-15	195	83	41.5	203.5	6.5	66.5	9	1/2"	35	158	G1/4
GAC400-10	248	99	50	227	8.6	84	12	3/8"	40	177.5	G1/4
GAC400-15	248	99	50	227	8.6	84	12	1/2"	40	177.5	G1/4
GAC600-20	312	128	70	267.5	11	106	16	3/4"	50	205	G1/4
GAC600-25	312	128	70	267.5	11	106	16	1"	50	205	G1/4